



CMIP

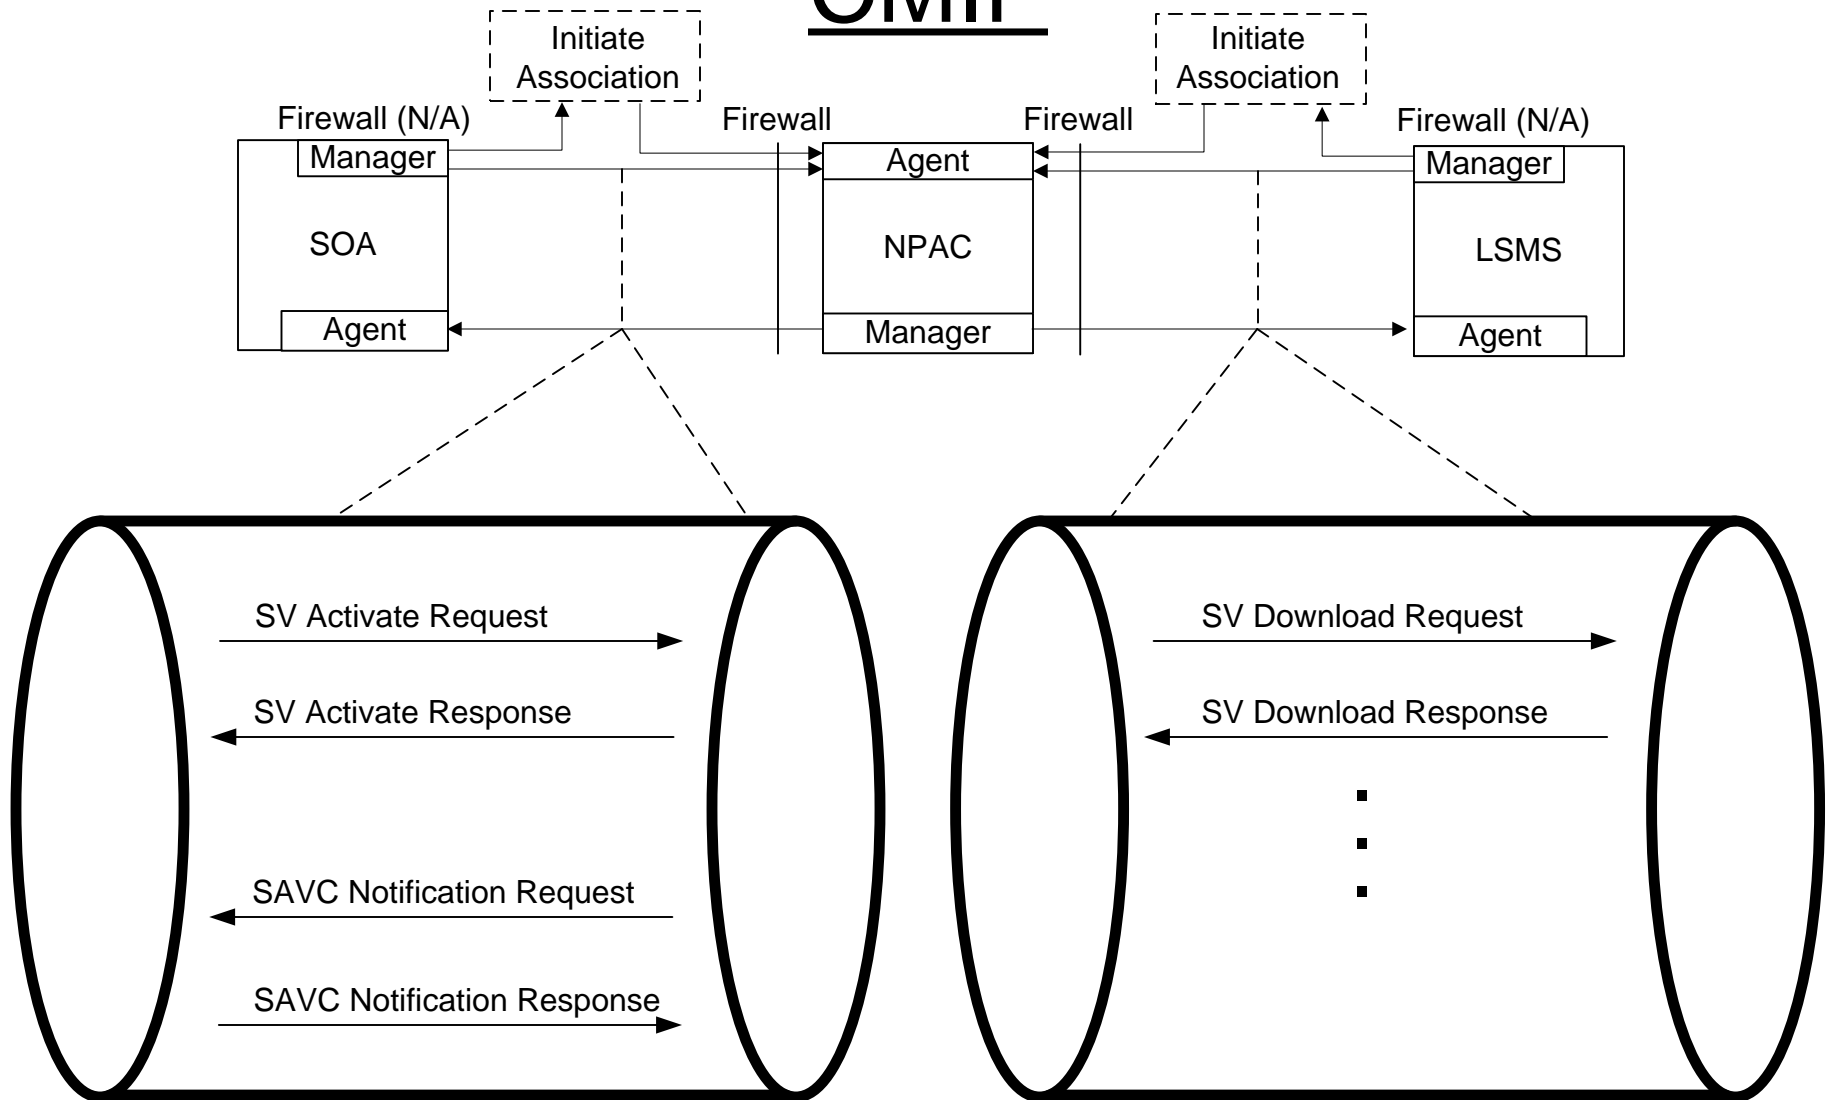

HTTPS

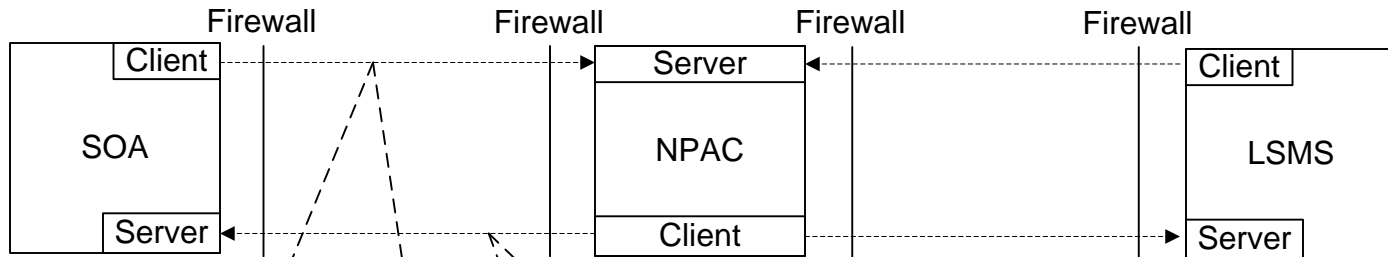

SOA Client

1. Open port
(for session-less message)
2. Send XML ActivateRequest
(with security validation)
3. Receive Ack from NPAC
4. Close port

NPAC Client

1. Open port
(for session-less message)
2. Send XML ActivateReply
(with security validation)
3. Receive Ack from SOA
4. Close port

Activate of an Authorized Subscription Version

